

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
12994

Total Pages in this Submission
3

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

RECEIVING CIRCUIT, MOBILE TERMINAL WITH RECEIVING CIRCUIT, AND METHOD OF RECEIVING DATA

and invented by:

Tomoaki Hokao

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 57 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
12994

Total Pages in this Submission
3

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal Number of Sheets 14
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail (Specify Label No.): EL452068715US

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
12994

Total Pages in this Submission
3

Accompanying Application Parts (Continued)

15. ☒ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*
16. ☒ Additional Enclosures *(please identify below):*


Claim of Priority

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	63	- 20 =	43	x \$18.00	\$774.00
Indep. Claims	6	- 3 =	3	x \$78.00	\$234.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose) <u>Recordation of Assignment</u>					\$40.00
TOTAL FILING FEE					\$1,808.00

- ☒ A check in the amount of **\$1,808.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **19-1013/SSMP** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).



Signature
Paul J. Esatto, Jr.
Registration No: 30,749

Dated: September 23, 1999

SCULLY, SCOTT, MURPHY & PRESSER
400 Garden City Plaza
Garden City, New York 11530
(516) 742-4343

cc:

RECEIVING CIRCUIT, MOBILE TERMINAL WITH RECEIVING
CIRCUIT, AND METHOD OF RECEIVING DATA

BACKGROUND OF THE INVENTION

5 1. Field of the Invention:

The present invention relates to a mobile communication system based on the principles of CDMA (Code Division Multiplex Access), and more particularly to a receiving circuit in a mobile terminal in a mobile communication system based on the principles of CDMA.

10 2. Description of the Related Art:

In recent years, mobile communication systems are finding a growing number of subscribers and are required to increase their capacity to accommodate subscribers.

15 One approach to an increased capacity to accommodate subscribers is a technique known as CDMA in which one frequency band is shared by signals spread by a plurality of mathematically orthogonal codes.

In a CDMA mobile communication system, the receiving circuit of each mobile terminal has a plurality of finger receivers for inversely diffusing transmitted data in association with respective multiple paths. The transmitted data are inversely diffused by the finger receivers and then synthesized with each other.

25 Fig. 1 of the accompanying drawings shows in block form a receiving circuit in a mobile terminal in a

conventional mobile communication system.

As shown in Fig. 1, the receiving circuit comprises an antenna 1 and a radio unit 2 for receiving data, a plurality of finger receivers 3-1 through 3-n associated
5 with respective multiple paths, for inversely diffusing the data received via the antenna 1 and the radio unit 2, a maximum ratio synthesizer 4 for synthesizing the data inversely diffused by the finger receivers 3-1 through 3-n, a search engine 5 for detecting respective components
10 of the multiple paths, a timing controller 7 for controlling the timing of operation of the finger receivers 3-1 through 3-n, and a CPU 6 for controlling operation of the timing controller 7 based on the components detected by the search engine 5.

15 The receiving circuit shown in Fig. 1 operates as follows: When data is received by the antenna 1 and the radio unit 2, the data is inversely diffused by the finger receivers 3-1 through 3-n, and thereafter the inversely diffused data are synthesized by the maximum
20 ratio synthesizer 4 into data which is outputted to a subsequent circuit (not shown).

When data is received by the antenna 1 and the radio unit 2, all the finger receivers 3-1 through 3-n are in operation.

25 In the conventional receiving circuit, however, since the all the finger receivers 3-1 through 3-n

operate even if the received data contains no speech signal, the receiving circuit causes a wasteful consumption of current when the received data contains no speech signal.

5

SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a receiving circuit which is capable of reducing a consumed current when received data contains
10 no speech signal.

To achieve the above object, there is provided in accordance with the present invention a receiving circuit comprising an antenna and a radio unit for receiving a signal transmitted via a radio link, a plurality of
15 finger receivers for inversely diffusing the signal received by antenna and the radio unit in association with respective multiple paths, a synthesizer for synthesizing signals inversely diffused by the finger receivers, and means for controlling the number of finger
20 receivers to operate, among the plurality of finger receivers, based on whether or not a speech signal or data is contained in the signal received by antenna and the radio unit.

The receiving circuit may further comprise means
25 for controlling the number of finger receivers to operate if a speech signal or data is not contained in the

signal received by antenna and the radio unit, based on the number of base stations which are communicating with the receiving circuit.

The receiving circuit may further comprise means
5 for controlling the number of finger receivers to operate if a speech signal or data is not contained in the signal received by antenna and the radio unit, based on whether the receiving circuit is in a soft hand-over mode or not.

10 The receiving circuit may further comprise means for operating as many finger receivers as the number of base stations which are communicating with the receiving circuit if the receiving circuit is in the soft hand-over mode, and operating a minimum number of finger receivers
15 required to detect whether or not a speech signal or data is contained in the signal received by antenna and the radio unit, if the receiving circuit is not in the soft hand-over mode.

The receiving circuit may further comprise means
20 for controlling the number of finger receivers to operate by controlling the supply of a clock signal to the plurality of finger receivers.

According to the present invention, there is also provided a receiving circuit comprising an antenna and a
25 radio unit for receiving data, a plurality of finger receivers for inversely diffusing the data received by

antenna and the radio unit in association with respective multiple paths, a synthesizer for synthesizing signals inversely diffused by the finger receivers, detecting means for detecting whether there is a speech signal or not based on the data inversely diffused by the finger receivers, and control means for controlling the number of finger receivers to operate, among the plurality of finger receivers, based on a detected result from the detecting means.

10 The control means may comprise means for operating all the finger receivers if a speech signal is detected by the detecting means.

At least one of the finger receivers is operated at all times without being controlled by the control means, and the detecting means may comprise means for detecting whether there is a speech signal or not based on the data inversely diffused by the at least one of the finger receivers.

Alternatively, at least two of the finger receivers are operated at all times without being controlled by the control means, and the detecting means may comprise means for detecting whether there is a speech signal or not based on the data inversely diffused by the at least two of the finger receivers.

25 The detecting means may comprise a plurality of detecting means associated with the plurality of finger

receivers, respectively.

The control means may comprise means for operating,
at all times, one of the plurality of finger receivers
which has a highest correlated value, and controlling
5 operation of the other finger receivers based on a
detected result from the detecting means associated with
the one of the finger receivers.

The detecting means may comprise two detecting
means associated respectively with two of the plurality
10 of finger receivers, and the control means may comprise
means for operating the two finger receivers associated
with the two detecting means at all times irrespective of
detected results from the detecting means and controlling
operation of the other finger receivers based on the
15 detected results from the detecting means if the
receiving circuit is in a hand-over mode, and operating
one of the two finger receivers associated with the two
detecting means at all times irrespective of detected
results from the detecting means and controlling
20 operation of the other finger receivers based on the
detected results from the detecting means if the
receiving circuit is not in the hand-over mode.

The control means may comprise means for operating,
at all times, two of the plurality of finger receivers
25 which have a highest correlated value irrespective of
detected results from the detecting means, and

controlling operation of the other finger receivers based on detected results from the detecting means associated with the two of the finger receivers, if the receiving circuit is in a hand-over mode, and operating, at all
5 times, one of the plurality of finger receivers which has a highest correlated value irrespective of detected results from the detecting means, and controlling operation of the other finger receivers based on a detected result from the detecting means associated with
10 the one of the finger receivers, if the receiving circuit is not in the hand-over mode.

According to the present invention, there is further provided a receiving circuit comprising an antenna and a radio unit for receiving data, a plurality
15 of finger receivers for inversely diffusing the data received by antenna and the radio unit in association with respective multiple paths, a synthesizer for synthesizing signals inversely diffused by the finger receivers, a decoder for decoding the data synthesized by
20 the synthesizer, detecting means for detecting whether there is a speech signal or not based on the data decoded by the decoder, and control means for controlling the number of finger receivers to operate, among the plurality of finger receivers, based on a detected result
25 from the detecting means.

The control means may comprise means for operating

all the finger receivers if a speech signal is detected by the detecting means.

The control means may comprise means for operating, at all times, one of the plurality of finger receivers
5 which has a highest correlated value.

The control means may comprise means for controlling operation of the plurality of finger receivers by controlling the supply of a clock signal to the plurality of finger receivers.

10 According to the present invention, there is further provided a mobile terminal in a mobile communication system, the mobile terminal having the receiving circuit described above.

According to the present invention, there is also
15 provided a method of receiving data by inversely diffusing a signal received by an antenna and a radio unit with a plurality of receivers of a receiving circuit in association with respective multiple paths, synthesizing inversely diffused signals, and outputting a
20 synthesized signal, comprising the step of controlling the number of receivers to operate, among the plurality of receivers, based on whether or not a speech signal or data is contained in the signal received by the antenna and the radio unit.

25 The method may further comprise the step of controlling the number of receivers to operate if a

speech signal or data is not contained in the signal received by antenna and the radio unit, based on the number of base stations which are communicating with the receiving circuit.

5 The method may further comprise the step of controlling the number of receivers to operate if a speech signal or data is not contained in the signal received by antenna and the radio unit, based on whether the receiving circuit is in a soft hand-over mode or not.

10 The method may further comprise the steps of operating as many finger receivers as the number of base stations which are communicating with the receiving circuit if the receiving circuit is in the soft hand-over mode, and operating a minimum number of finger receivers
15 required to detect whether or not a speech signal or data is contained in the signal received by antenna and the radio unit, if the receiving circuit is not in the soft hand-over mode.

 The method may further comprise the step of
20 controlling the number of receivers to operate by controlling the supply of a clock signal to the plurality of receivers.

 According to the present invention, there is also provided a method of receiving data by inversely
25 diffusing data received by an antenna and a radio unit with a plurality of receivers of a receiving circuit in

association with respective multiple paths, synthesizing
inversely diffused data, and outputting synthesized data,
comprising the steps of detecting whether there is a
speech signal or not based on the inversely diffused
5 data, and controlling the number of receivers to operate,
among the plurality of receivers, based on a detected
result of whether there is a speech signal or not.

The method may further comprise the step of
operating all the receivers if a speech signal is
10 detected.

The method may further comprise the step of
operating at least one of the plurality of receivers at
all times.

The method may further comprise the step of
15 operating at least two of the plurality of receivers at
all times.

The method may further comprise the step of
operating, at all times, one of the plurality of
receivers which has a highest correlated value.

20 The method may further comprise the steps of
operating at least two of the receivers at all times if
the receiving circuit is in a hand-over mode, and
operating one of the receivers at all times if the
receiving circuit is not in the hand-over mode.

25 The method may further comprise the steps of
operating two of the receivers which have a highest

correlated value at all times if the receiving circuit is in the hand-over mode, and operating one of the receivers which has a highest correlated value at all times if the receiving circuit is not in the hand-over mode.

5 According to the present invention, there is further provided a method of receiving data by inversely diffusing data received by an antenna and a radio unit with a plurality of receivers of a receiving circuit in association with respective multiple paths, synthesizing
10 inversely diffused data, decoding synthesized data, and outputting decoded data, comprising the steps of detecting whether there is a speech signal or not based on the decoded data, and controlling the number of receivers to operate, among the plurality of receivers,
15 based on a detected result of whether there is a speech signal or not.

 The method may further comprise the step of operating all the receivers if a speech signal is detected.

20 The method may further comprise the step of operating, at all times, one of the plurality of receivers which has a highest correlated value.

 The method may further comprise the step of controlling operation of the plurality of receivers by
25 controlling the supply of a clock signal to the plurality of receivers.

With the arrangement of the present invention, as described above, the detecting means detects whether there is a speech signal or not based on data inversely diffused by the finger receivers, and the number of
5 finger receivers to operate, among the plurality of finger receivers, is controlled on the basis of a detected result.

Specifically, if the detecting means detects a speech signal, then all the finger receivers are
10 controlled to operate, and if the detecting means detects no speech signal, then a minimum number of finger receivers, preferably one or two finger receivers, which are required to detect whether there is a speech signal or not, are controlled to operate.

15 Consequently, the receiving circuit does not consume a wasteful current when the received data contains no speech signal.

The above and other objects, features, and advantages of the present invention will become apparent
20 from the following description with reference to the accompanying drawings which illustrate examples of the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

25 Fig. 1 is a block diagram of a receiving circuit in a mobile terminal in a conventional mobile communication

system;

Fig. 2 is a diagram of a mobile communication system including mobile terminals each having a receiving circuit according to the present invention;

5 Fig. 3 is a block diagram of a receiving circuit according to a first embodiment of the present invention;

Fig. 4 is a flowchart of an operation sequence of the receiving circuit shown in Fig. 3;

Fig. 5 is a block diagram of a receiving circuit
10 according to a second embodiment of the present invention;

Fig. 6 is a flowchart of an operation sequence of the receiving circuit shown in Fig. 5;

Fig. 7 is a block diagram of a receiving circuit
15 according to a third embodiment of the present invention;

Fig. 8 is a flowchart of an operation sequence of the receiving circuit shown in Fig. 7;

Fig. 9 is a block diagram of a receiving circuit
20 according to a fourth embodiment of the present invention;

Fig. 10 is a flowchart of an operation sequence of the receiving circuit shown in Fig. 9;

Fig. 11 is a block diagram of a receiving circuit according to a fifth embodiment of the present invention;

25 Fig. 12 is a flowchart of an operation sequence of the receiving circuit shown in Fig. 11;

Fig. 13 is a block diagram of a receiving circuit according to a sixth embodiment of the present invention; and

Fig. 14 is a flowchart of an operation sequence of
5 the receiving circuit shown in Fig. 13.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 2 shows a mobile communication system including mobile terminals each having a receiving
10 circuit according to the present invention.

As shown in Fig. 12, the mobile communication system has a plurality of mobile terminals 10a, 10b each having a receiving circuit according to the present invention, a plurality of base stations 20a, 20b covering
15 respective service areas 40a, 40b and connected to the mobile terminals 10a, 10b via radio links, and an exchange 30 for performing switching control for the base stations 20a, 20b. Though only two base stations 20a, 20b and two base stations 20a, 20b are illustrated in
20 Fig. 2, the mobile communication system actually has a plurality of mobile terminals more than two mobile stations and a plurality of base stations more than two base stations.

When the mobile terminals 10a, 10b are present in
25 the service area 40a covered by the base station 20a, the mobile terminals 10a, 10b receive a service from the base

station 20a. When the mobile terminals 10a, 10b are present in the service area 40b covered by the base station 20b, the mobile terminals 10a, 10b receive a service from the base station 20b. When the mobile
5 terminals 10a, 10b are present in the vicinity of a boundary between a plurality of service areas, the mobile terminals 10a, 10b communicate with a plurality of base stations (soft hand-over).

Embodiments of the receiving circuit in each of the
10 mobile terminals 10a, 10b will be described in detail below.

1st Embodiment:

Fig. 3 shows in block form a receiving circuit according to a first embodiment of the present invention.

15 As shown in Fig. 3, the receiving circuit comprises an antenna 1 and a radio unit 2 for receiving data, a plurality of finger receivers 3-1 through 3-n for being supplied with the data received via the antenna 1 and the radio unit 2 and inversely diffusing the data in
20 association with a plurality of multiple paths, a maximum ratio synthesizer 4 for synthesizing the data inversely diffused by the finger receivers 3-1 through 3-n, a search engine 5 for detecting respective components of the multiple paths, a timing controller 7 for controlling
25 the timing of operation of the finger receivers 3-1 through 3-n, a CPU 6 for controlling operation of the

timing controller 7 based on the components detected by the search engine 5, a speech/no-speech signal detector 8 for detecting whether there is a speech signal or not based on the data inversely diffused by the finger receiver 3-1, a clock controller 9 as control means for controlling the supply of a clock signal to the finger receivers 3-2 through 3-n based on a detected result from the speech/no-speech signal detector 8, and a plurality of switches 12-2 through 12-n for switching on and off the supply of the clock signal to the finger receivers 3-2 through 3-n under the control of the clock controller 9. The timing controller 7 outputs a frame signal at all times to the finger receivers 3-1 through 3-n for keeping the finger receivers 3-1 through 3-n in synchronism with each other.

A process of controlling operation of the finger receivers 3-1 through 3-n in the receiving circuit shown in Fig. 3 will be described below.

Fig. 4 shows an operation sequence of the receiving circuit shown in Fig. 3.

As shown in Fig. 4, a speech communication session starts between the base station 20a (see Fig. 2) and the mobile terminal 10a (see Fig. 2) in step S1, and data is received via the antenna 1 and the radio unit 2 in step S2. The clock controller 9 turns on or connects all the switches 12-2 through 12-n, supplying the clock signal to

all the finger receivers 3-1 through 3-n. The finger receivers 3-1 through 3-n now inversely diffuse the data received via the antenna 1 and the radio unit 2 in step S3.

5 Then, the speech/no-speech signal detector 8 detects whether there is a speech signal based on the data inversely diffused by the finger receiver 3-1 in step S4. If a speech signal is detected, then control returns to step S3, in which the finger receivers 3-1
10 through 3-n inversely diffuse the data received via the antenna 1 and the radio unit 2.

 If no speech signal is detected in step S4, then the clock controller 9 turns off or disconnect the switches 12-2 through 12-n, supplying no clock signal to
15 the finger receivers 3-2 through 3-n.

 The finger receivers 3-2 through 3-n are inactivated, and the data received via the antenna 1 and the radio unit 2 is inversely diffused by only the finger receiver 3-1 in step S5.

20 Control then goes back to step S4, in which the speech/no-speech signal detector 8 detects whether there is a speech signal based on the data inversely diffused by the finger receiver 3-1.

2nd Embodiment:

25 In the first embodiment described above, the receiving circuit has a single speech/no-speech signal

detector, and the finger receiver connected to the speech/no-speech signal detector operates at all times. The speech/no-speech signal detector detects whether there is a speech signal or not based on the data
5 supplied to the finger receiver connected to the speech/no-speech signal detector, and operation of the other finger receivers is controlled on the basis of a detected result from the speech/no-speech signal detector. However, a plurality of speech/no-speech
10 signal detectors may be connected respectively to the finger receivers, and the finger receiver with a highest correlated value may operate at all times, with the other finger receivers being controlled in operation based on a detected result from the speech/no-speech signal detector
15 that is connected to the finger receiver in operation at all times.

Fig. 5 shows in block form a receiving circuit according to a second embodiment of the present invention.

20 As shown in Fig. 5, the receiving circuit comprises an antenna 1 and a radio unit 2 for receiving data, a plurality of finger receivers 3-1 through 3-n for being supplied with the data received via the antenna 1 and the radio unit 2 and inversely diffusing the data in
25 association with a plurality of multiple paths, a maximum ratio synthesizer 4 for synthesizing the data inversely

diffused by the finger receivers 3-1 through 3-n, a search engine 5 for detecting respective components of the multiple paths, a timing controller 7 for controlling the timing of operation of the finger receivers 3-1 through 3-n, a CPU 6 for controlling operation of the timing controller 7 based on the components detected by the search engine 5, a plurality of speech/no-speech signal detectors 8-1 through 8-n for detecting whether there is a speech signal or not based on the data inversely diffused by the respective finger receivers 3-1 through 3-n, a clock controller 9 for controlling the supply of a clock signal to the finger receivers 3-1 through 3-n under the control of the CPU 6 or based on detected results from the speech/no-speech signal detectors 8-1 through 8-n, and a plurality of switches 12-1 through 12-n for switching on and off the supply of the clock signal to the finger receivers 3-1 through 3-n under the control of the clock controller 9. The timing controller 7 outputs a frame signal at all times to the finger receivers 3-1 through 3-n for keeping the finger receivers 3-1 through 3-n in synchronism with each other.

A process of controlling operation of the finger receivers 3-1 through 3-n in the receiving circuit shown in Fig. 5 will be described below.

Fig. 6 shows an operation sequence of the receiving circuit shown in Fig. 5.

As shown in Fig. 6, a speech communication session starts between the base station 20a (see Fig. 2) and the mobile terminal 10a (see Fig. 2) in step S11, and data is received via the antenna 1 and the radio unit 2 in step S12. The clock controller 9 turns on or connects all the switches 12-1 through 12-n, supplying the clock signal to all the finger receivers 3-1 through 3-n. The finger receivers 3-1 through 3-n now inversely diffuse the data received via the antenna 1 and the radio unit 2 in step S13.

Then, the speech/no-speech signal detectors 8-1 through 8-n detect whether there is a speech signal based on the data inversely diffused by the finger receivers 3-1 through 3-n in step S14. If a speech signal is detected, then control returns to step S13, in which the finger receivers 3-1 through 3-n inversely diffuse the data received via the antenna 1 and the radio unit 2.

If no speech signal is detected in step S14, then the finger receiver whose correlated value is highest, among the finger receivers 3-1 through 3-n, is indicated from the CPU 6 to the clock controller 9, which controls the switches 12-2 through 12-n to supply the clock signal to the finger receiver whose correlated value is highest and supply no clock signal to the other finger receivers.

If it is assumed that the finger receiver 3-1 has the highest correlated value, then the clock controller 9

connects or closes the switch 12-1 and disconnects or opens the switches 12-2 through 12-n, so that the clock signal is supplied to the finger receiver 3-1 and no clock signal is supplied to the finger receivers 3-2 through 3-n.

The finger receivers 3-2 through 3-n are inactivated, and the data received via the antenna 1 and the radio unit 2 is inversely diffused by only the finger receiver 3-1 in step S15.

Control then goes back to step S14, in which the speech/no-speech signal detector 8 detects whether there is a speech signal based on the data inversely diffuse by the finger receiver 3-1.

3rd Embodiment:

In the first and second embodiments described above, speech signal or no speed data is detected before the received data is decoded. However, it is possible to detect speech signal or no speed data after the received data is decoded, and control operation of the finger receivers based on a detected result of speech signal or no speed data.

Fig. 7 shows in block form a receiving circuit according to a third embodiment of the present invention.

As shown in Fig. 7, the receiving circuit comprises an antenna 1 and a radio unit 2 for receiving data, a plurality of finger receivers 3-1 through 3-n for being

supplied with the data received via the antenna 1 and the radio unit 2 and inversely diffusing the data in association with a plurality of multiple paths, a maximum ratio synthesizer 4 for synthesizing the data inversely
5 diffused by the finger receivers 3-1 through 3-n, a search engine 5 for detecting respective components of the multiple paths, a timing controller 7 for controlling the timing of operation of the finger receivers 3-1 through 3-n, a CPU 6 for controlling operation of the
10 timing controller 7 based on the components detected by the search engine 5, a decoder 11 for Viterbi-decoding the data synthesized by the maximum ratio synthesizer 4, a speech/no-speech signal detector 18 as detecting means for detecting whether there is a speech signal or not
15 based on the data decoded by the decoder 11, a clock controller 9 for controlling the supply of a clock signal to the finger receivers 3-2 through 3-n under the control of the CPU 6 or based on a detected result from the speech/no-speech signal detector 18, and a plurality of
20 switches 12-1 through 12-n for switching on and off the supply of the clock signal to the finger receivers 3-1 through 3-n under the control of the clock controller 9. The timing controller 7 outputs a frame signal at all times to the finger receivers 3-1 through 3-n for keeping
25 the finger receivers 3-1 through 3-n in synchronism with each other.

A process of controlling operation of the finger receivers 3-1 through 3-n in the receiving circuit shown in Fig. 7 will be described below.

Fig. 8 shows an operation sequence of the receiving
5 circuit shown in Fig. 7.

As shown in Fig. 7, a speech communication session starts between the base station 20a (see Fig. 2) and the mobile terminal 10a (see Fig. 2) in step S21, and data is received via the antenna 1 and the radio unit 2 in step
10 S22. The clock controller 9 turns on or connects all the switches 12-1 through 12-n, supplying the clock signal to all the finger receivers 3-1 through 3-n. The finger receivers 3-1 through 3-n now inversely diffuse the data received via the antenna 1 and the radio unit 2 in step
15 S23.

Then, the maximum ratio synthesizer 4 synthesizes the data inversely diffused by the finger receivers 3-1 through 3-n in step S24.

The decoder 11 Viterbi-decodes the data synthesized
20 by the maximum ratio synthesizer 4 and outputs the decoded data in step S25.

Then, the speech/no-speech signal detector 18 detects whether there is a speech signal based on the data outputted from the decoder 11 in step S26. If a
25 speech signal is detected, then control returns to step S23, in which the finger receivers 3-1 through 3-n

inversely diffuse the data received via the antenna 1 and the radio unit 2.

If no speech signal is detected in step S26, then the finger receiver whose correlated value is highest, among the finger receivers 3-1 through 3-n, is indicated from the CPU 6 to the clock controller 9, which controls the switches 12-2 through 12-n to supply the clock signal to the finger receiver whose correlated value is highest and supply no clock signal to the other finger receivers.

If it is assumed that the finger receiver 3-1 has the highest correlated value, then the clock controller 9 connects the switch 12-1 and disconnects the switches 12-2 through 12-n, so that the clock signal is supplied to the finger receiver 3-1 and no clock signal is supplied to the finger receivers 3-2 through 3-n.

The finger receivers 3-2 through 3-n are inactivated, and the data received via the antenna 1 and the radio unit 2 is inversely diffused by only the finger receiver 3-1 in step S27.

The data inversely diffused by the finger receiver 3-1 is supplied via the maximum ratio synthesizer 4 to the decoder 11, which Viterbi-decodes the data. Thereafter, the speech/no-speech signal detector 18 detects whether there is a speech signal based on the data outputted from the decoder 11.

In the third embodiment, the finger receiver whose

correlated value is highest is operated as with the second embodiment. However, a predetermined finger receiver may be operated as with the first embodiment.

4th Embodiment:

5 In the mobile communication system, when a mobile terminal, like the mobile terminal 10b shown in Fig. 2, is present in a region where the service areas 40a, 40b of the two base stations 20a, 20b overlap each other, the mobile terminal is in a soft hand-over mode in which it
10 receives the services from at least the two base stations.

 In that region, therefore, it is necessary that at least two finger receivers of the mobile terminal be operated.

15 Fig. 9 shows in block form a receiving circuit according to a fourth embodiment of the present invention.

 As shown in Fig. 9, the receiving circuit comprises an antenna 1 and a radio unit 2 for receiving data, a
20 plurality of finger receivers 3-1 through 3-n for being supplied with the data received via the antenna 1 and the radio unit 2 and inversely diffusing the data in association with a plurality of multiple paths, a maximum ratio synthesizer 4 for synthesizing the data inversely
25 diffused by the finger receivers 3-1 through 3-n, a search engine 5 for detecting respective components of

the multiple paths, a timing controller 7 for controlling the timing of operation of the finger receivers 3-1 through 3-n, a CPU 6 for controlling operation of the timing controller 7 based on the components detected by the search engine 5, a pair of speech/no-speech signal detectors 8-1, 8-2 for detecting whether there is a speech signal or not based on the respective data inversely diffused by the finger receivers 3-1, 3-2, a clock controller 9 for controlling the supply of a clock signal to the finger receivers 3-2 through 3-n based on detected results from the speech/no-speech signal detectors 8-1, 8-2, and a plurality of switches 12-3 through 12-n for switching on and off the supply of the clock signal to the finger receivers 3-3 through 3-n under the control of the clock controller 9. The timing controller 7 outputs a frame signal at all times to the finger receivers 3-1 through 3-n for keeping the finger receivers 3-1 through 3-n in synchronism with each other.

A process of controlling operation of the finger receivers 3-1 through 3-n in the receiving circuit shown in Fig. 9 will be described below.

Fig. 10 shows an operation sequence of the receiving circuit shown in Fig. 9.

As shown in Fig. 10, a speech communication session starts between the base station 20a (see Fig. 2) and the mobile terminal 10a (see Fig. 2) in step S31, and data is

received via the antenna 1 and the radio unit 2 in step
S32. The clock controller 9 turns on or connects all the
switches 12-3 through 12-n, supplying the clock signal to
all the finger receivers 3-1 through 3-n. The finger
5 receivers 3-1 through 3-n now inversely diffuse the data
received via the antenna 1 and the radio unit 2 in step
S33.

Then, the speech/no-speech signal detectors 8-1, 8-
2 detect whether there is a speech signal based on the
10 data inversely diffused by the finger receivers 3-1, 3-2
in step S34. If a speech signal is detected by at least
one of the finger receivers 3-1, 3-2, then control
returns to step S33, in which the finger receivers 3-1
through 3-n inversely diffuse the data received via the
15 antenna 1 and the radio unit 2.

If no speech signal is detected by both the finger
receivers 3-1, 3-2 in step S34, then the clock controller
9 disconnects the switches 12-3 through 12-n to supply no
clock signal to the finger receivers 3-3 through 3-n.

20 The finger receivers 3-3 through 3-n are
inactivated, and the data received via the antenna 1 and
the radio unit 2 is inversely diffused by only the finger
receivers 3-1, 3-2 in step S35.

Control then goes back to step S34, in which the
25 speech/no-speech signal detectors 8-1, 8-2 detect whether
there is a speech signal based on the data supplied to

the finger receivers 3-1, 3-2.

In the fourth embodiments, the two finger receivers are operated at all times. However, it is preferable to select the number of finger receivers that need to be operated, based on the number (preferably 3) of base stations that communicate with the mobile terminal in a soft hand-over mode in an actual system or zone configuration.

5th Embodiment:

10 In the fourth embodiment, the two speech/no-speech signal detectors are provided in view of the soft hand-over mode, and the two finger receivers connected to the speech/no-speech signal detectors are operated at all times. The speech/no-speech signal detectors detect
15 whether there is a speech signal or not based on the data supplied to the two finger receivers, and operation of the other finger receivers is controlled on the basis of detected results from the speech/no-speech signal detectors. However, when no speech signal is detected,
20 if the mobile terminal is in a soft hand-over mode, then at least two finger receivers may be operated, and if the mobile terminal is not in a soft hand-over mode, then only one finger receiver may be operated, so that the current consumed by the mobile terminal when no speech
25 signal is detected can further be reduced.

Fig. 11 shows in block form a receiving circuit

according to a fifth embodiment of the present invention.

As shown in Fig. 11, the receiving circuit comprises an antenna 1 and a radio unit 2 for receiving data, a plurality of finger receivers 3-1 through 3-n for
5 being supplied with the data received via the antenna 1 and the radio unit 2 and inversely diffusing the data in association with a plurality of multiple paths, a maximum ratio synthesizer 4 for synthesizing the data inversely diffused by the finger receivers 3-1 through 3-n, a
10 search engine 5 for detecting respective components of the multiple paths, a timing controller 7 for controlling the timing of operation of the finger receivers 3-1 through 3-n, a CPU 6 for controlling operation of the timing controller 7 based on the components detected by
15 the search engine 5, a pair of speech/no-speech signal detectors 8-1, 8-2 for detecting whether there is a speech signal or not based on the respective data inversely diffused by the finger receivers 3-1, 3-2, a clock controller 9 for controlling the supply of a clock
20 signal to the finger receivers 3-2 through 3-n under the control of the CPU 6 or based on detected results from the speech/no-speech signal detectors 8-1, 8-2, and a plurality of switches 12-2 through 12-n for switching on and off the supply of the clock signal to the finger
25 receivers 3-2 through 3-n under the control of the clock controller 9. The timing controller 7 outputs a frame

signal at all times to the finger receivers 3-1 through 3-n for keeping the finger receivers 3-1 through 3-n in synchronism with each other.

A process of controlling operation of the finger
5 receivers 3-1 through 3-n in the receiving circuit shown in Fig. 11 will be described below.

Fig. 12 shows an operation sequence of the receiving circuit shown in Fig. 11.

As shown in Fig. 12, a speech communication session
10 starts between the base station 20a (see Fig. 2) and the mobile terminal 10a (see Fig. 2) in step S41, and data is received via the antenna 1 and the radio unit 2 in step S42. The clock controller 9 turns on or connects all the switches 12-2 through 12-n, supplying the clock signal to
15 all the finger receivers 3-1 through 3-n. The finger receivers 3-1 through 3-n now inversely diffuse the data received via the antenna 1 and the radio unit 2 in step S43.

Then, the speech/no-speech signal detectors 8-1, 8-
20 2 detect whether there is a speech signal based on the data inversely diffused by the finger receivers 3-1, 3-2 in step S44. If a speech signal is detected by at least one of the finger receivers 3-1, 3-2, then control returns to step S43, in which the finger receivers 3-1
25 through 3-n inversely diffuse the data received via the antenna 1 and the radio unit 2.

If no speech signal is detected by both the finger receivers 3-1, 3-2 in step S44, then the search engine 5 and the CPU 6 decides whether the mobile terminal is in a soft hand-over mode or not in step S45. If the mobile terminal is not in a soft hand-over mode, then the clock controller 9 disconnects or opens the switches 12-2 through 12-n to supply no clock signal to the finger receivers 3-2 through 3-n.

The finger receivers 3-2 through 3-n are inactivated, and the data received via the antenna 1 and the radio unit 2 is inversely diffused by only the finger receiver 3-1 in step S46.

Control then goes back to step S44, in which the speech/no-speech signal detector 8-1 detects whether there is a speech signal based on the data supplied to the finger receiver 3-1.

If the mobile terminal is in a soft hand-over mode in step S45, then the clock controller 9 connects the switch 12-2 and disconnects the switches 12-3 through 12-n, supplying no clock signal to the finger receivers 3-3 through 3-n. At this time, it is assumed that the finger receiver 3-1 receives a signal from one of the base stations and the finger receiver 3-2 receives a signal from the other base station.

The finger receivers 3-3 through 3-n are inactivated, and the data received via the antenna 1 and

the radio unit 2 is inversely diffused by only the finger receivers 3-1, 3-2 in step S47.

Control then goes back to step S44, in which the speech/no-speech signal detectors 8-1, 8-2 detect whether
5 there is a speech signal based on the data inversely diffused by the finger receivers 3-1, 3-2.

6th Embodiment:

In the fifth embodiment, the two speech/no-speech signal detectors are provided, and one of the two finger
10 receivers connected to the speech/no-speech signal detectors is operated at all times. When the mobile terminal is in a soft hand-over mode, the two finger receivers connected to the speech/no-speech signal detectors are operated at all times, the speech/no-speech
15 signal detectors detect whether there is a speech signal or not based on the data supplied to the two finger receivers, and operation of the other finger receivers is controlled on the basis of detected results from the speech/no-speech signal detectors. However, a plurality
20 of speech/no-speech signal detectors may be connected respectively to a plurality of finger receivers. One or two of the finger receivers whose correlated value is highest may be operated, and operation of the other finger receivers may controlled on the basis of a
25 detected result or results, indicative of speech signal or no speech signal, from the speech/no-speech signal

detector or detectors connected to the one or two of the finger receivers.

Fig. 13 shows in block form a receiving circuit according to a sixth embodiment of the present invention.

5 As shown in Fig. 13, the receiving circuit comprises an antenna 1 and a radio unit 2 for receiving data, a plurality of finger receivers 3-1 through 3-n for being supplied with the data received via the antenna 1 and the radio unit 2 and inversely diffusing the data in
10 association with a plurality of multiple paths, a maximum ratio synthesizer 4 for synthesizing the data inversely diffused by the finger receivers 3-1 through 3-n, a search engine 5 for detecting respective components of the multiple paths, a timing controller 7 for controlling
15 the timing of operation of the finger receivers 3-1 through 3-n, a CPU 6 for controlling operation of the timing controller 7 based on the components detected by the search engine 5, a plurality of speech/no-speech signal detectors 8-1 through 8-n for detecting whether
20 there is a speech signal or not based on the respective data inversely diffused by the finger receivers 3-1 through 3-n, a clock controller 9 for controlling the supply of a clock signal to the finger receivers 3-1 through 3-n under the control of the CPU 6 or based on
25 detected results from the speech/no-speech signal detectors 8-1 through 8-n, and a plurality of switches

12-1 through 12-n for switching on and off the supply of the clock signal to the finger receivers 3-1 through 3-n under the control of the clock controller 9. The timing controller 7 outputs a frame signal at all times to the
5 finger receivers 3-1 through 3-n for keeping the finger receivers 3-1 through 3-n in synchronism with each other.

A process of controlling operation of the finger receivers 3-1 through 3-n in the receiving circuit shown in Fig. 13 will be described below.

10 Fig. 14 shows an operation sequence of the receiving circuit shown in Fig. 13.

As shown in Fig. 14, a speech communication session starts between the base station 20a (see Fig. 2) and the mobile terminal 10a (see Fig. 2) in step S51, and data is
15 received via the antenna 1 and the radio unit 2 in step S52. The clock controller 9 turns on or connects all the switches 12-1 through 12-n, supplying the clock signal to all the finger receivers 3-1 through 3-n. The finger receivers 3-1 through 3-n now inversely diffuse the data
20 received via the antenna 1 and the radio unit 2 in step S53.

Then, the speech/no-speech signal detectors 8-1 through 8-n detect whether there is a speech signal based on the data inversely diffused by the finger receivers 3-
25 1 through 3-n in step S54. If a speech signal is detected, then control returns to step S53, in which the

finger receivers 3-1 through 3-n inversely diffuse the data received via the antenna 1 and the radio unit 2.

If no speech signal is detected in step S54, then the search engine 5 and the CPU 6 decides whether the mobile terminal is in a soft hand-over mode or not in step S55. If the mobile terminal is not in a soft hand-over mode, then the finger receiver whose correlated value is highest, among the finger receivers 3-1 through 3-n, is indicated from the CPU 6 to the clock controller 9, which controls the switches 12-1 through 12-n to supply the clock signal to the finger receiver whose correlated value is highest and supply no clock signal to the other finger receivers.

If it is assumed that the finger receiver 3-1 has the highest correlated value, then the clock controller 9 connects or closes the switch 12-1 and disconnects or opens the switches 12-2 through 12-n, so that the clock signal is supplied to the finger receiver 3-1 and no clock signal is supplied to the finger receivers 3-2 through 3-n.

The finger receivers 3-2 through 3-n are inactivated, and the data received via the antenna 1 and the radio unit 2 is inversely diffused by only the finger receiver 3-1 in step S56.

Control then goes back to step S54, in which the speech/no-speech signal detector 8-1 detects whether

there is a speech signal based on the data inversely diffused by the finger receiver 3-1.

If the mobile terminal is in a soft hand-over mode in step S55, then the finger receiver whose correlated value is highest and the finger receiver whose correlated value is second highest, among the finger receivers 3-1 through 3-n, are indicated from the CPU 6 to the clock controller 9, which controls the switches 12-1 through 12-n to supply the clock signal to the finger receiver whose correlated value is highest and the finger receiver whose correlated value is second highest, and supply no clock signal to the other finger receivers.

If it is assumed that the finger receiver 3-1 has the highest correlated value and the finger receiver 3-2 has the second highest correlated value, then the clock controller 9 connects or closes the switches 12-1, 12-2 and disconnects or opens the switches 12-3 through 12-n, so that the clock signal is supplied to the finger receivers 3-1, 3-2 and no clock signal is supplied to the finger receivers 3-3 through 3-n.

The finger receivers 3-3 through 3-n are inactivated, and the data received via the antenna 1 and the radio unit 2 is inversely diffused by only the finger receivers 3-1, 3-2 in step S57.

Control then goes back to step S54, in which the speech/no-speech signal detectors 8-1, 8-2 detect whether

there is a speech signal based on the data inversely diffused by the finger receivers 3-1, 3-2.

In the first through sixth embodiments described above, operation of the finger receivers is controlled on the basis of whether there is a speech signal or not during a speech communication session. However, the present invention is applicable to not only speech communications, but also data communications where received data is burst data, for receiving data in a power saving mode during periods free of such burst data.

According to the present invention, as described above, the receiving circuit has a detecting means for detecting whether there is a speech signal or not based on data inversely diffused by a plurality of finger receivers, and a control means for controlling the number of finger receivers that operate, among the plurality of finger receivers, based on a detected result from the detecting means. If the detecting means detects speech signal, then the control means controls all the finger receivers to operate. If the detecting means detects no speech signal, then the control means controls only one or two of the finger receivers to operate which are required for the detecting means to detect whether there is a speech signal or not. Consequently, the current consumed by the receiving circuit when there is no speech signal can be reduced.

While preferred embodiments of the present invention have been described using specific terms, such description is for illustrative purposes only, and it is to be understood that changes and variations may be made
5 without departing from the spirit or scope of the following claims.

What is claimed is:

1. A receiving circuit comprising:
 - an antenna and a radio unit for receiving a signal transmitted via a radio link;
 - a plurality of finger receivers for inversely
 - 5 diffusing the signal received by the antenna and the radio unit in association with respective multiple paths;
 - a synthesizer for synthesizing signals inversely diffused by said finger receivers; and
 - means for controlling a number of finger
 - 10 receivers to operate, among said plurality of finger receivers, based on whether or not a speech signal or data is contained in the signal received by the antenna and the radio unit.
2. A receiving circuit according to claim 1, further comprising means for controlling a number of finger receivers to operate if a speech signal or data is not contained in the signal received by the antenna and
- 5 the radio unit, based on a number of base stations which are communicating with the receiving circuit.
3. A receiving circuit according to claim 1, further comprising means for controlling a number of finger receivers to operate if a speech signal or data is not contained in the signal received by the antenna and

5 the radio unit, based on whether the receiving circuit is in a soft hand-over mode or not.

4. A receiving circuit according to claim 3, further comprising means for operating as many finger receivers as a number of base stations which are communicating with the receiving circuit if the receiving
5 circuit is in the soft hand-over mode, and operating a minimum number of finger receivers required to detect whether or not a speech signal or data is contained in the signal received by the antenna and the radio unit, if the receiving circuit is not in the soft hand-over mode.

5. A receiving circuit according to claim 1, further comprising means for controlling the number of finger receivers to operate by controlling a supply of a clock signal to said plurality of finger receivers.

6. A receiving circuit according to claim 2, further comprising means for controlling the number of finger receivers to operate by controlling a supply of a clock signal to said plurality of finger receivers.

7. A receiving circuit according to claim 3, further comprising means for controlling the number of finger receivers to operate by controlling a supply of a

clock signal to said plurality of finger receivers.

8. A receiving circuit according to claim 4, further comprising means for controlling the number of finger receivers to operate by controlling a supply of a clock signal to said plurality of finger receivers.

9. A receiving circuit comprising:

an antenna and a radio unit for receiving data;

a plurality of finger receivers for inversely diffusing the data received by the antenna and the radio

5 unit in association with respective multiple paths;

a synthesizer for synthesizing signals inversely diffused by said finger receivers;

detecting means for detecting whether there is a speech signal or not based on the data inversely

10 diffused by said finger receivers; and

control means for controlling a number of finger receivers to operate, among said plurality of finger receivers, based on a detected result from said detecting means.

10. A receiving circuit according to claim 9, wherein said control means comprises means for operating all the finger receivers if a speech signal is detected by said detecting means.

11. A receiving circuit according to claim 9,
wherein at least one of said finger receivers is operated
at all times without being controlled by said control
means, and said detecting means comprises means for
5 detecting whether there is a speech signal or not based
on data inversely diffused by said at least one of the
finger receivers.

12. A receiving circuit according to claim 10,
wherein at least one of said finger receivers is operated
at all times without being controlled by said control
means, and said detecting means comprises means for
5 detecting whether there is a speech signal or not based
on data inversely diffused by said at least one of the
finger receivers.

13. A receiving circuit according to claim 9,
wherein at least two of said finger receivers are
operated at all times without being controlled by said
control means, and said detecting means comprises means
5 for detecting whether there is a speech signal or not
based on data inversely diffused by said at least two of
the finger receivers.

14. A receiving circuit according to claim 10,

wherein at least two of said finger receivers are operated at all times without being controlled by said control means, and said detecting means comprises means
5 for detecting whether there is a speech signal or not based on data inversely diffused by said at least two of the finger receivers.

15. A receiving circuit according to claim 9, wherein said detecting means comprises a plurality of detecting means associated with said plurality of finger receivers, respectively.

16. A receiving circuit according to claim 10, wherein said detecting means comprises a plurality of detecting means associated with said plurality of finger receivers, respectively.

17. A receiving circuit according to claim 15, wherein said control means comprises means for operating, at all times, one of said plurality of finger receivers which has a highest correlated value, and controlling
5 operation of other finger receivers based on a detected result from the detecting means associated with said one of the finger receivers.

18. A receiving circuit according to claim 16,

wherein said control means comprises means for operating,
at all times, one of said plurality of finger receivers
which has a highest correlated value, and controlling
5 operation of other finger receivers based on a detected
result from the detecting means associated with said one
of the finger receivers.

19. A receiving circuit according to claim 9,
wherein said detecting means comprises two detecting
means associated respectively with two of said plurality
of finger receivers, and said control means comprises
5 means for operating the two finger receivers associated
with said two detecting means at all times irrespective
of detected results from said detecting means and
controlling operation of other finger receivers based on
the detected results from said detecting means if the
10 receiving circuit is in a hand-over mode, and operating
one of the two finger receivers associated with said two
detecting means at all times irrespective of detected
results from said detecting means and controlling
operation of other finger receivers based on the detected
15 results from said detecting means if the receiving
circuit is not in the hand-over mode.

20. A receiving circuit according to claim 10,
wherein said detecting means comprises two detecting

means associated respectively with two of said plurality
of finger receivers, and said control means comprises
5 means for operating the two finger receivers associated
with said two detecting means at all times irrespective
of detected results from said detecting means and
controlling operation of other finger receivers based on
the detected results from said detecting means if the
10 receiving circuit is in a hand-over mode, and operating
one of the two finger receivers associated with said two
detecting means at all times irrespective of detected
results from said detecting means and controlling
operation of other finger receivers based on the detected
15 results from said detecting means if the receiving
circuit is not in the hand-over mode.

21. A receiving circuit according to claim 15,
wherein said control means comprises means for operating,
at all times, two of said plurality of finger receivers
which have a highest correlated value irrespective of
5 detected results from said detecting means, and
controlling operation of other finger receivers based on
detected results from the detecting means associated with
said two of the finger receivers, if the receiving
circuit is in a hand-over mode, and operating, at all
10 times, one of said plurality of finger receivers which
has a highest correlated value irrespective of detected

results from said detecting means, and controlling
operation of other finger receivers based on a detected
result from the detecting means associated with said one
15 of the finger receivers, if the receiving circuit is not
in the hand-over mode.

22. A receiving circuit according to claim 16,
wherein said control means comprises means for operating,
at all times, two of said plurality of finger receivers
which have a highest correlated value irrespective of
5 detected results from said detecting means, and
controlling operation of other finger receivers based on
detected results from the detecting means associated with
said two of the finger receivers, if the receiving
circuit is in a hand-over mode, and operating, at all
10 times, one of said plurality of finger receivers which
has a highest correlated value irrespective of detected
results from said detecting means, and controlling
operation of other finger receivers based on a detected
result from the detecting means associated with said one
15 of the finger receivers, if the receiving circuit is not
in the hand-over mode.

23. A receiving circuit comprising:

an antenna and a radio unit for receiving data;
a plurality of finger receivers for inversely

diffusing the data received by the antenna and the radio
5 unit in association with respective multiple paths;

a synthesizer for synthesizing signals
inversely diffused by said finger receivers;

a decoder for decoding the data synthesized by
said synthesizer;

10 detecting means for detecting whether there is
a speech signal or not based on the data decoded by said
decoder; and

control means for controlling a number of
finger receivers to operate, among said plurality of
15 finger receivers, based on a detected result from said
detecting means.

24. A receiving circuit according to claim 23,
wherein said control means comprises means for operating
all the finger receivers if a speech signal is detected
by said detecting means.

25. A receiving circuit according to claim 23,
wherein said control means comprises means for operating,
at all times, one of said plurality of finger receivers
which has a highest correlated value.

26. A receiving circuit according to claim 24,
wherein said control means comprises means for operating,

at all times, one of said plurality of finger receivers which has a highest correlated value.

27. A receiving circuit according to claim 9, wherein said control means comprises means for controlling operation of said plurality of finger receivers by controlling a supply of a clock signal to
5 said plurality of finger receivers.

28. A receiving circuit according to claim 15, wherein said control means comprises means for controlling operation of said plurality of finger receivers by controlling a supply of a clock signal to
5 said plurality of finger receivers.

29. A receiving circuit according to claim 23, wherein said control means comprises means for controlling operation of said plurality of finger receivers by controlling a supply of a clock signal to
5 said plurality of finger receivers.

30. A mobile terminal having a receiving circuit according to claim 1.

31. A mobile terminal having a receiving circuit according to claim 5.

32. A mobile terminal having a receiving circuit according to claim 9.

33. A mobile terminal having a receiving circuit according to claim 15.

34. A mobile terminal having a receiving circuit according to claim 23.

35. A mobile terminal having a receiving circuit according to claim 27.

36. A method of receiving data by inversely diffusing a signal received by an antenna and a radio unit with a plurality of receivers of a receiving circuit in association with respective multiple paths,
5 synthesizing inversely diffused signals, and outputting a synthesized signal, comprising the step of:

controlling a number of receivers to operate, among said plurality of receivers, based on whether or not a speech signal or data is contained in the signal
10 received by the antenna and the radio unit.

37. A method according to claim 36, further comprising the step of controlling the number of

receivers to operate if a speech signal or data is not
contained in the signal received by the antenna and the
5 radio unit, based on a number of base stations which are
communicating with the receiving circuit.

38. A method according to claim 36, further
comprising the step of controlling the number of
receivers to operate if a speech signal or data is not
contained in the signal received by the antenna and the
5 radio unit, based on whether a receiving circuit is in a
soft hand-over mode or not.

39. A method according to claim 38, further
comprising the steps of:

operating as many finger receivers as a number
of base stations which are communicating with the
5 receiving circuit if the receiving circuit is in the soft
hand-over mode; and

operating a minimum number of finger receivers
required to detect whether or not a speech signal or data
is contained in the signal received by the antenna and
10 the radio unit, if the receiving circuit is not in the
soft hand-over mode.

40. A method according to claim 36, further
comprising the step of controlling the number of

receivers to operate by controlling a supply of a clock signal to said plurality of receivers.

41. A method according to claim 37, further comprising the step of controlling the number of receivers to operate by controlling a supply of a clock signal to said plurality of receivers.

42. A method according to claim 38, further comprising the step of controlling the number of receivers to operate by controlling a supply of a clock signal to said plurality of receivers.

43. A method according to claim 39, further comprising the step of controlling the number of receivers to operate by controlling a supply of a clock signal to said plurality of receivers.

44. A method of receiving data by inversely diffusing data received by an antenna and a radio unit with a plurality of receivers of a receiving circuit in association with respective multiple paths, synthesizing
5 inversely diffused data, and outputting synthesized data, comprising the steps of:

detecting whether there is a speech signal or not based on the inversely diffused data; and

controlling a number of receivers to operate,
10 among said plurality of receivers, based on a detected
result of whether there is a speech signal or not.

45. A method according to claim 44, further
comprising the step of operating all the receivers if a
speech signal is detected.

46. A method according to claim 44, further
comprising the step of operating at least one of said
plurality of receivers at all times.

47. A method according to claim 45, further
comprising the step of operating at least one of said
plurality of receivers at all times.

48. A method according to claim 44, further
comprising the step of operating at least two of said
plurality of receivers at all times.

49. A method according to claim 45, further
comprising the step of operating at least two of said
plurality of receivers at all times.

50. A method according to claim 44, further
comprising the step of operating, at all times, one of

said plurality of receivers which has a highest correlated value.

51. A method according to claim 45, further comprising the step of operating, at all times, one of said plurality of receivers which has a highest correlated value.

52. A method according to claim 44, further comprising the steps of:

operating at least two of said receivers at all times if the receiving circuit is in a hand-over mode;

5 and

operating one of said receivers at all times if the receiving circuit is not in the hand-over mode.

53. A method according to claim 45, further comprising the steps of:

operating at least two of said receivers at all times if the receiving circuit is in a hand-over mode;

5 and

operating one of said receivers at all times if the receiving circuit is not in the hand-over mode.

54. A method according to claim 52, further comprising the steps of:

operating two of said receivers which have a
highest correlated value at all times if the receiving
5 circuit is in the hand-over mode; and

operating one of said receivers which has a
highest correlated value at all times if the receiving
circuit is not in the hand-over mode.

55. A method of receiving data by inversely
diffusing data received by an antenna and a radio unit
with a plurality of receivers of a receiving circuit in
association with respective multiple paths, synthesizing
5 inversely diffused data, decoding synthesized data, and
outputting decoded data, comprising the steps of:

detecting whether there is a speech signal or
not based on the decoded data; and

controlling a number of receivers to operate,
10 among said plurality of receivers, based on a detected
result of whether there is a speech signal or not.

56. A method according to claim 55, further
comprising the step of operating all the receivers if a
speech signal is detected.

57. A method according to claim 55, further
comprising the step of operating, at all times, one of
said plurality of receivers which has a highest

correlated value.

58. A method according to claim 56, further comprising the step of operating, at all times, one of said plurality of receivers which has a highest correlated value.

59. A method according to claim 44, further comprising the step of controlling operation of said plurality of receivers by controlling a supply of a clock signal to said plurality of receivers.

60. A method according to claim 45, further comprising the step of controlling operation of said plurality of receivers by controlling a supply of a clock signal to said plurality of receivers.

61. A method according to claim 52, further comprising the step of controlling operation of said plurality of receivers by controlling a supply of a clock signal to said plurality of receivers.

62. A method according to claim 55, further comprising the step of controlling operation of said plurality of receivers by controlling a supply of a clock signal to said plurality of receivers.

63. A method according to claim 56, further comprising the step of controlling operation of said plurality of receivers by controlling a supply of a clock signal to said plurality of receivers.

ABSTRACT OF THE DISCLOSURE

A receiving circuit has a speech/no-speech signal detector for detecting whether there is a speech signal or not based on data inversely diffused by finger receivers, and a clock controller for controlling operation of the finger receivers based on a detected result from the speech/no-speech signal detector. If a speech signal is detected by the speech/no-speech signal detector, then the clock controller controls all the finger receivers to operate. If no speech signal is detected by the speech/no-speech signal detector, then the clock controller controls only one or two of the finger receivers to operate.

Fig. 1 (Prior Art)

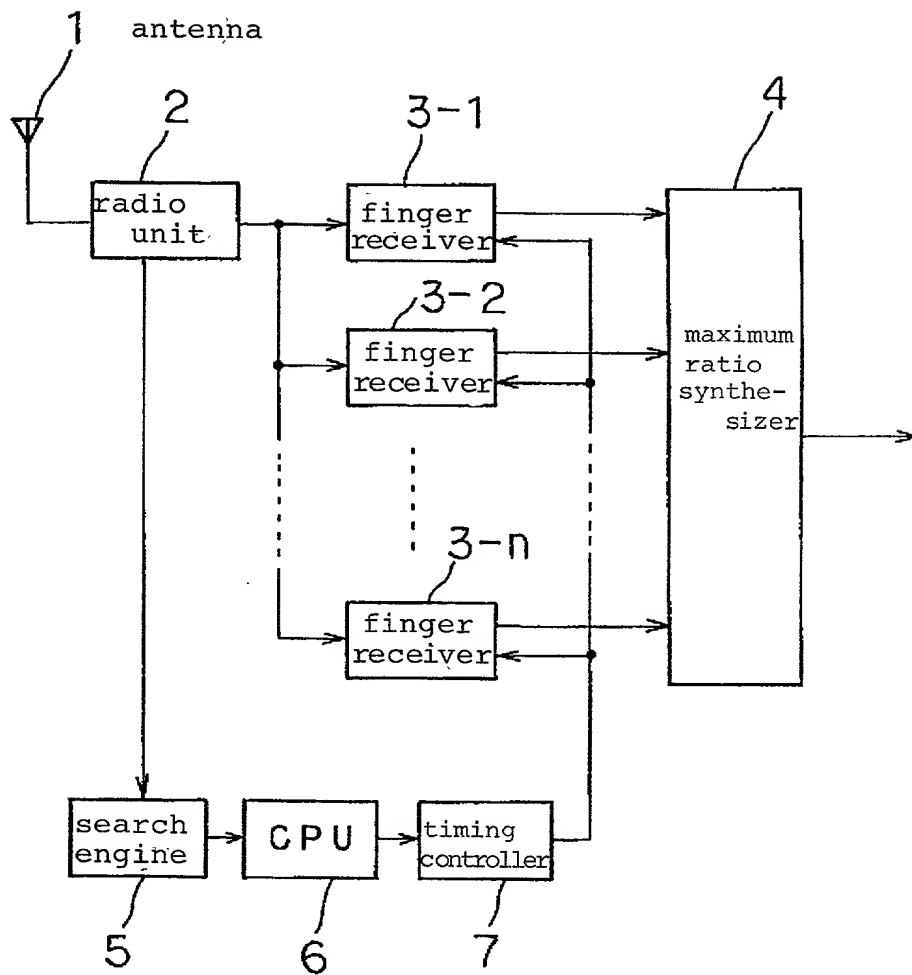


Fig. 2

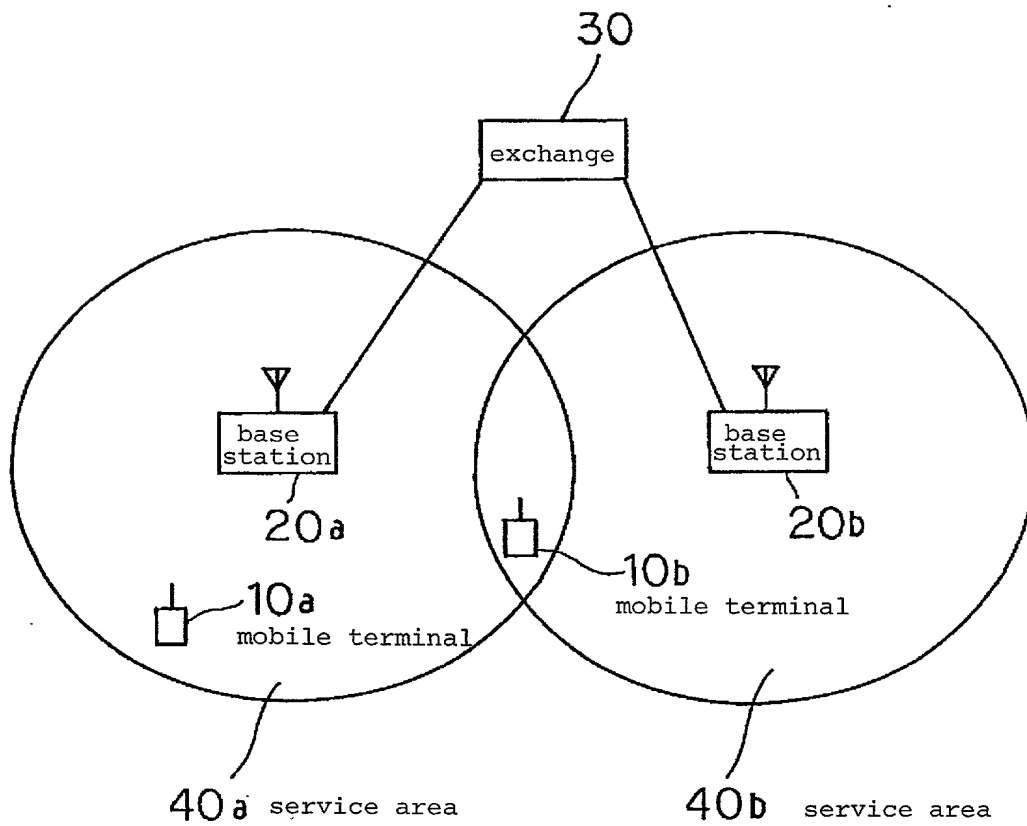


Fig. 3

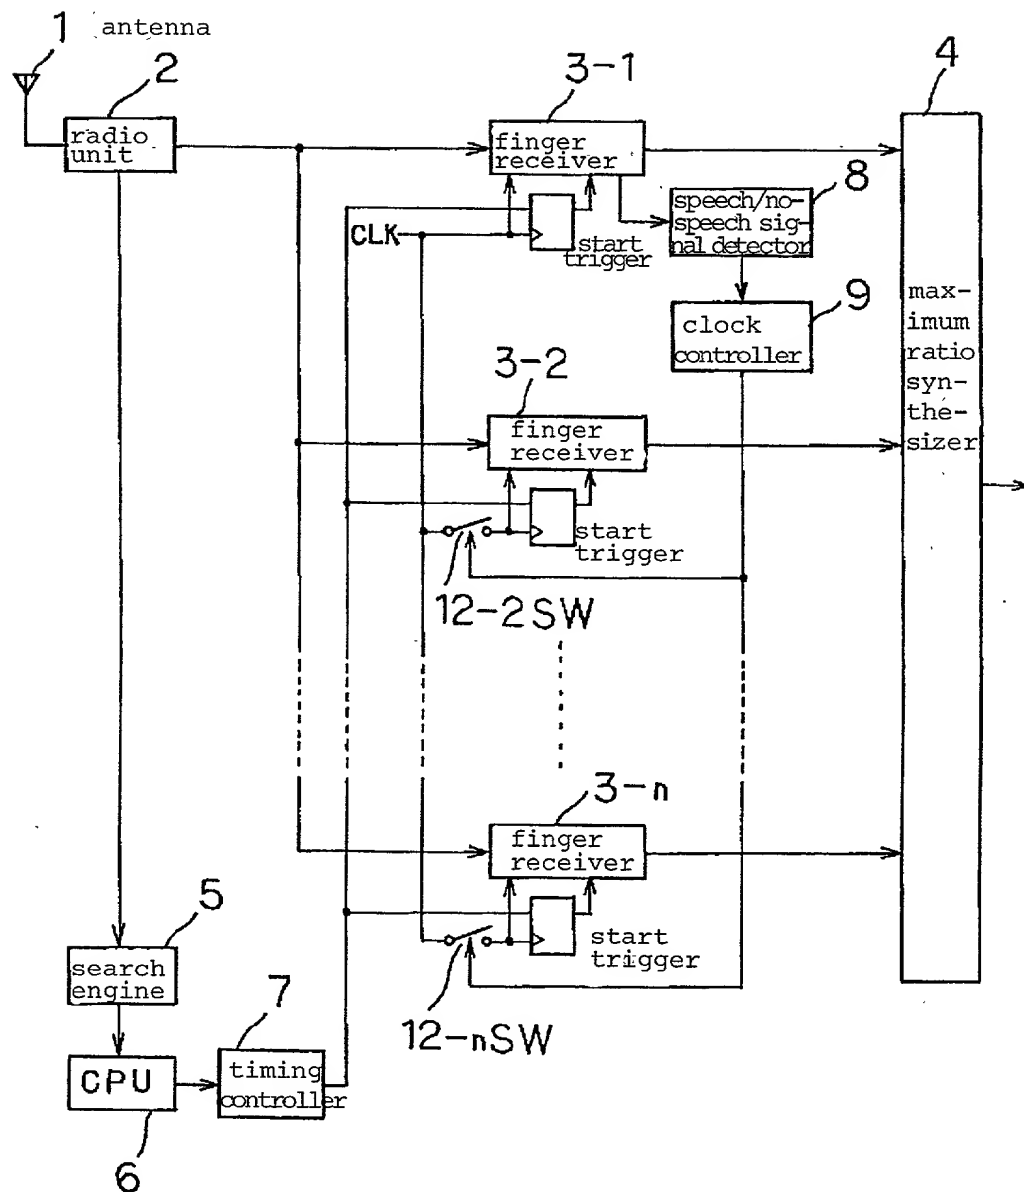


Fig. 4

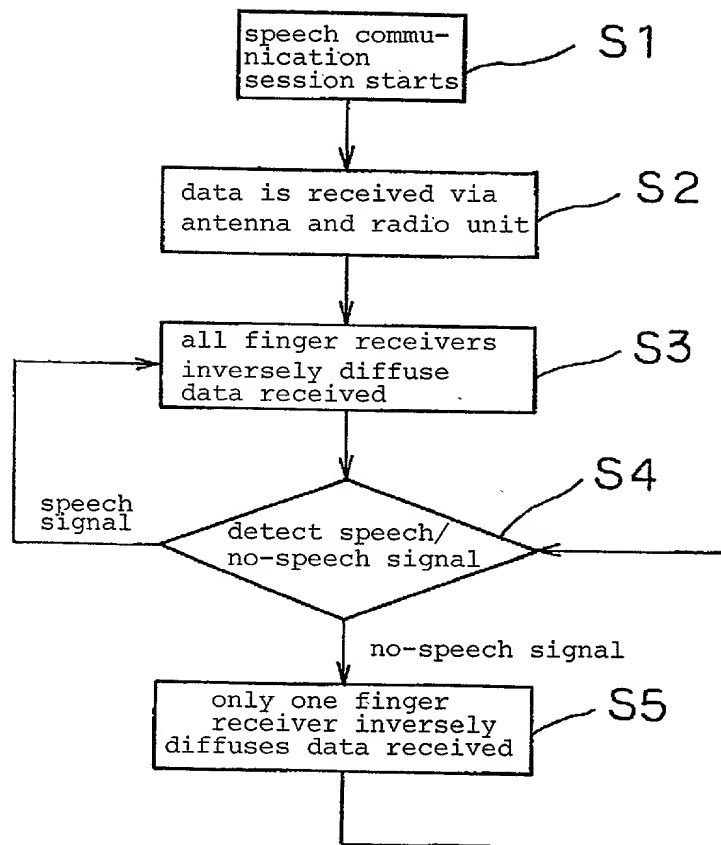


Fig. 5

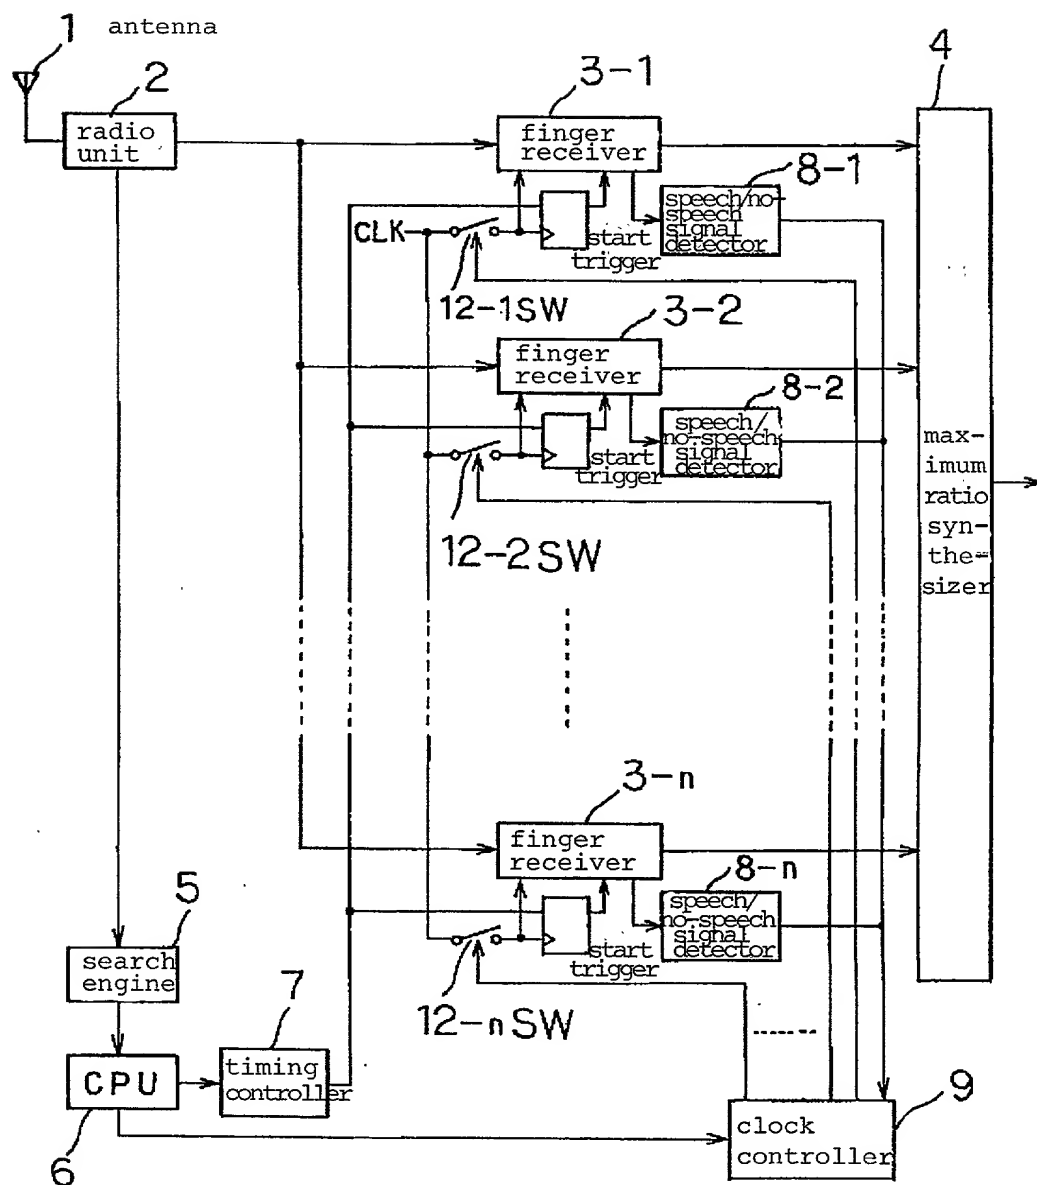


Fig. 6

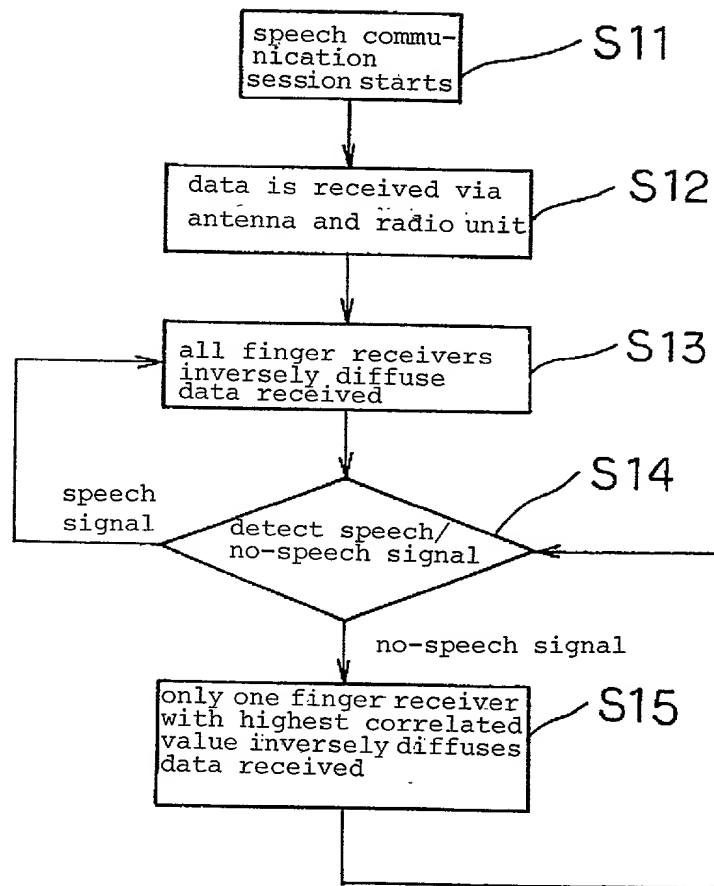


Fig. 7

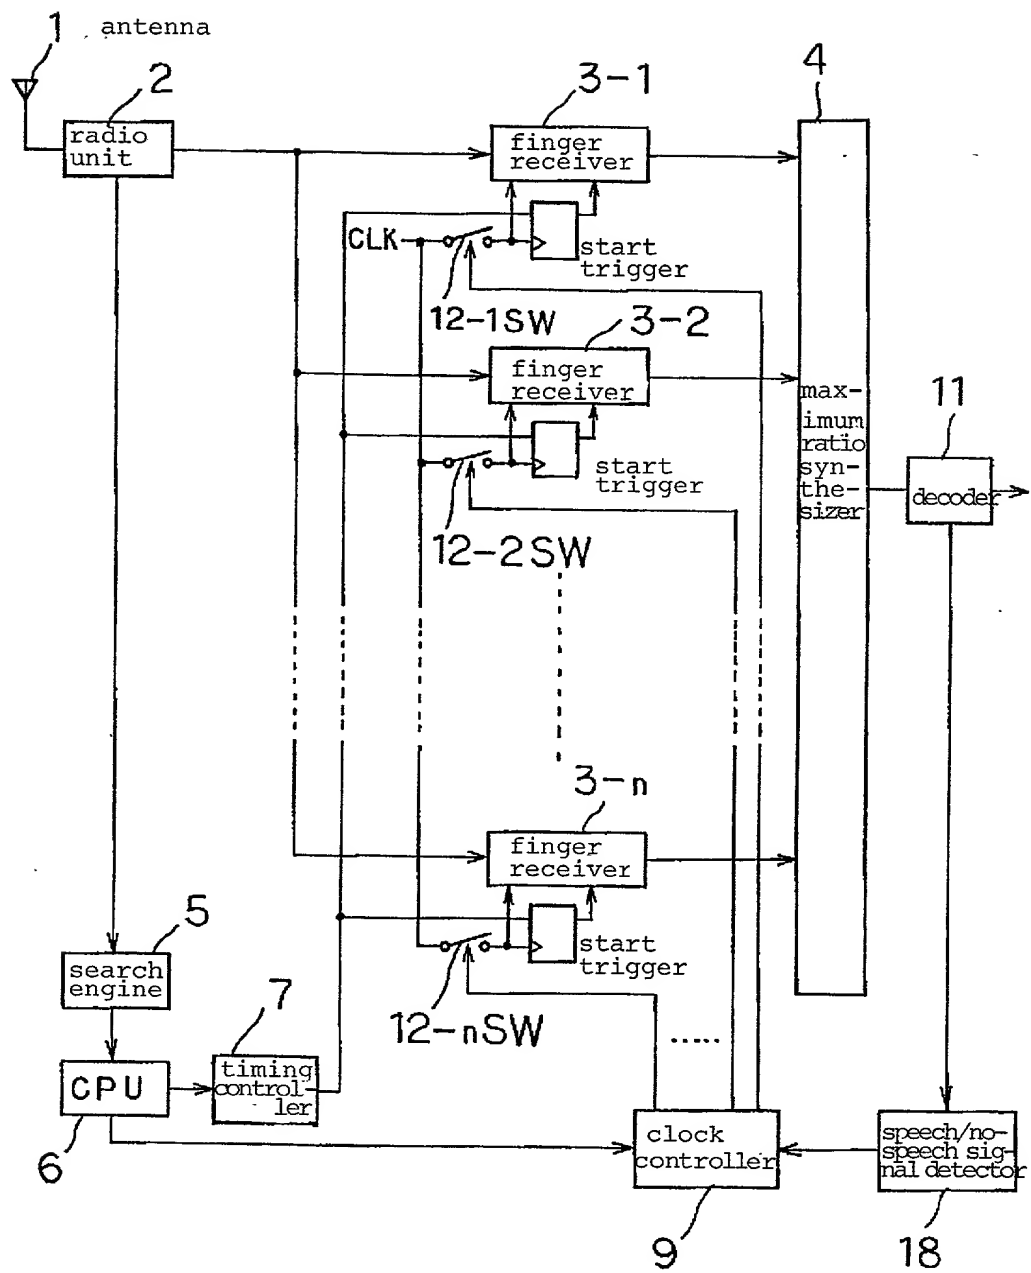


Fig. 8

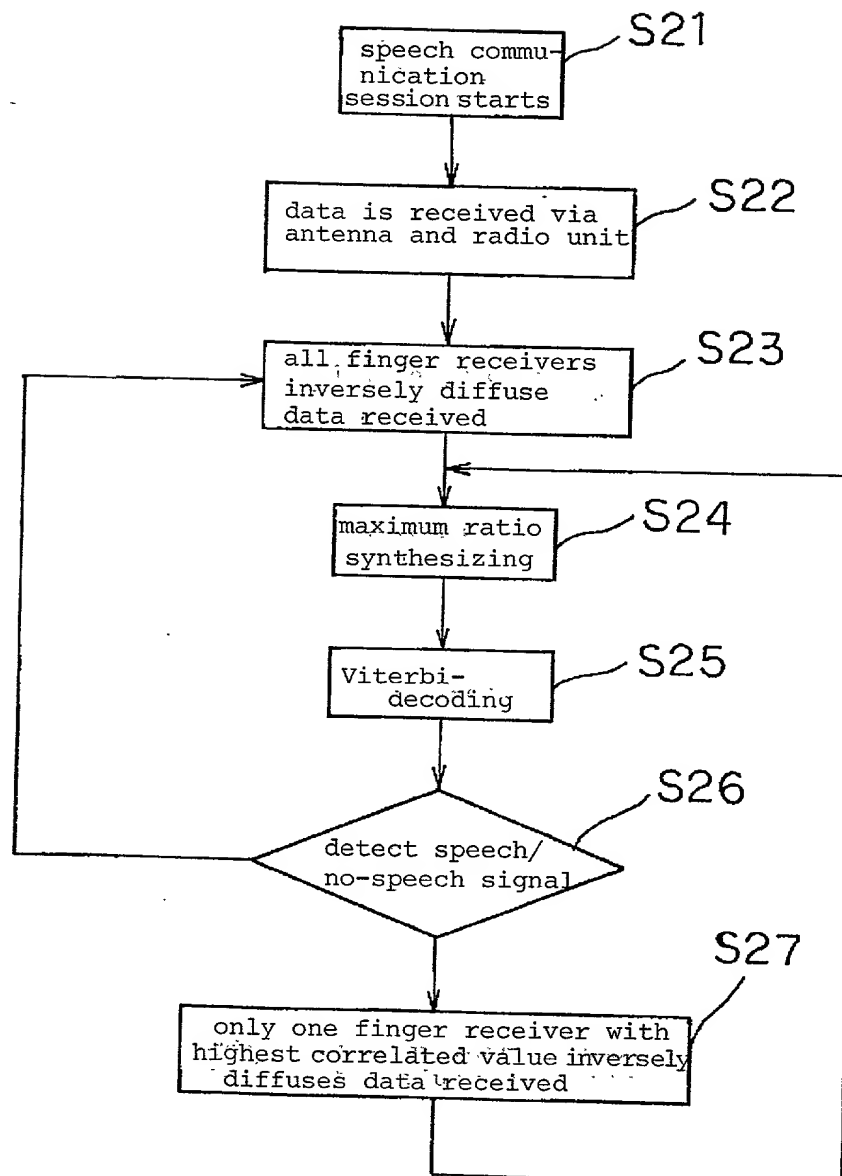


Fig. 9

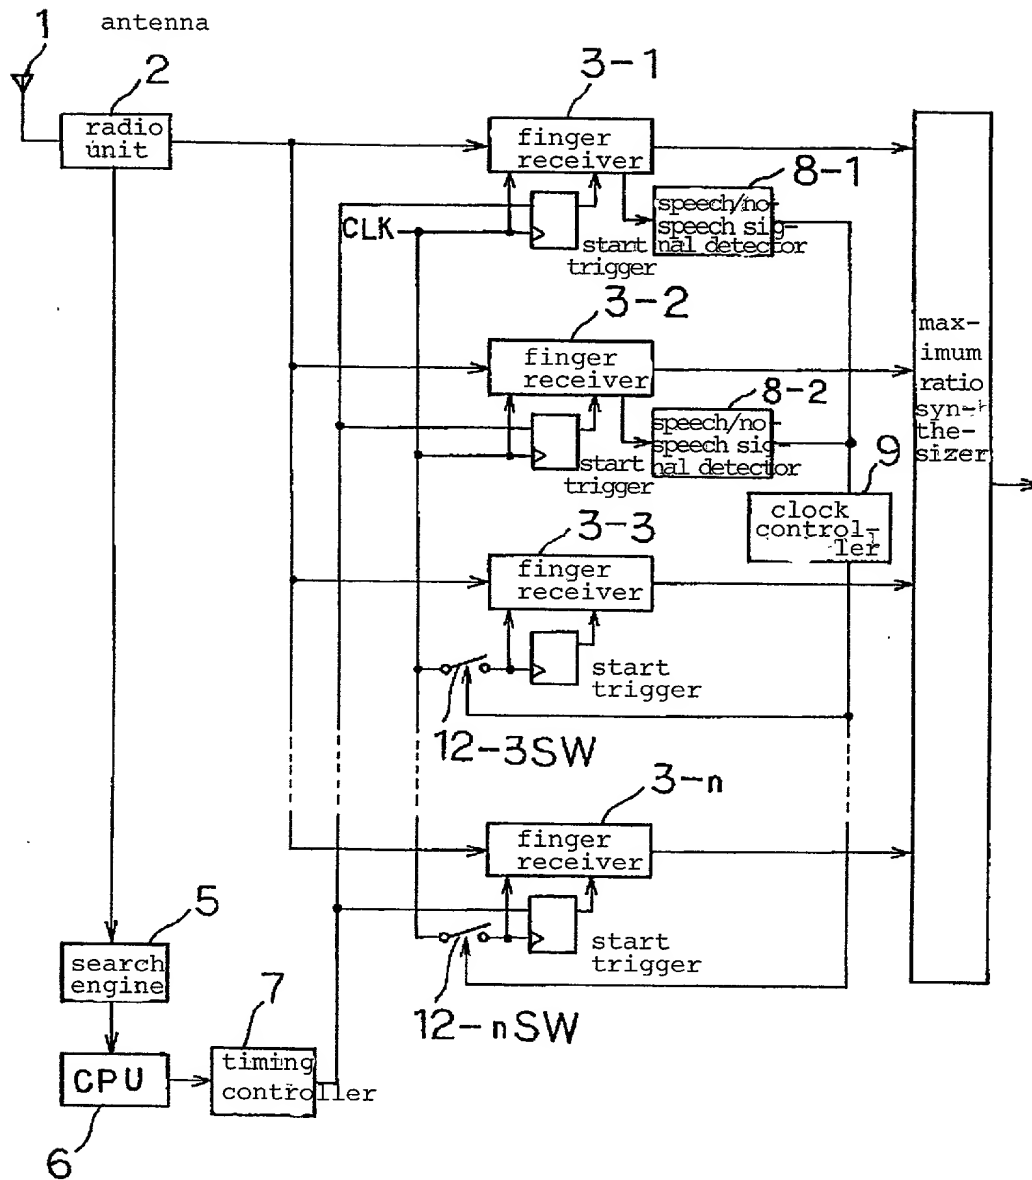


Fig. 10

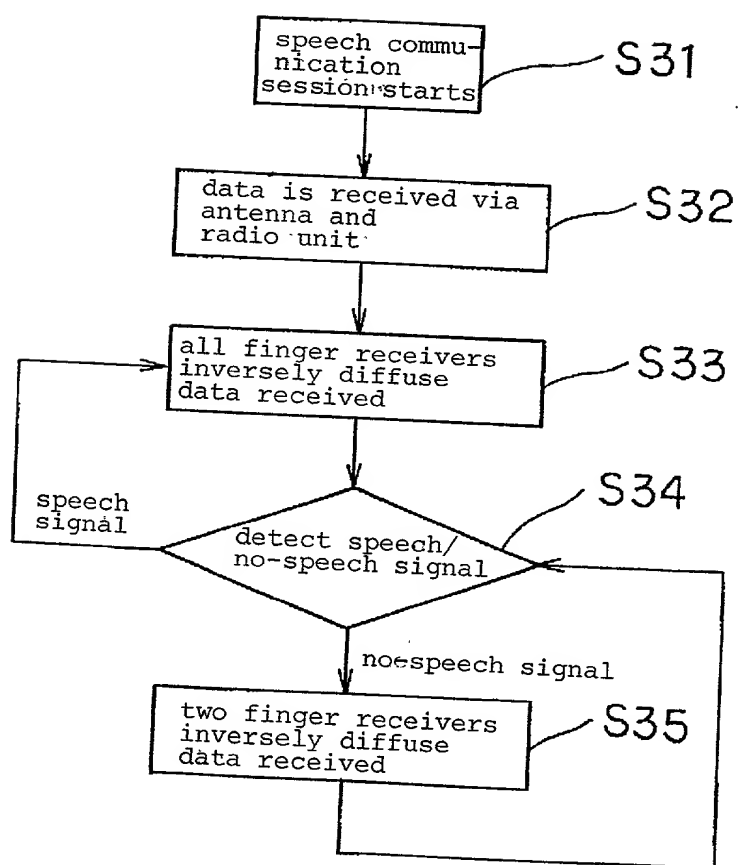


Fig. 11

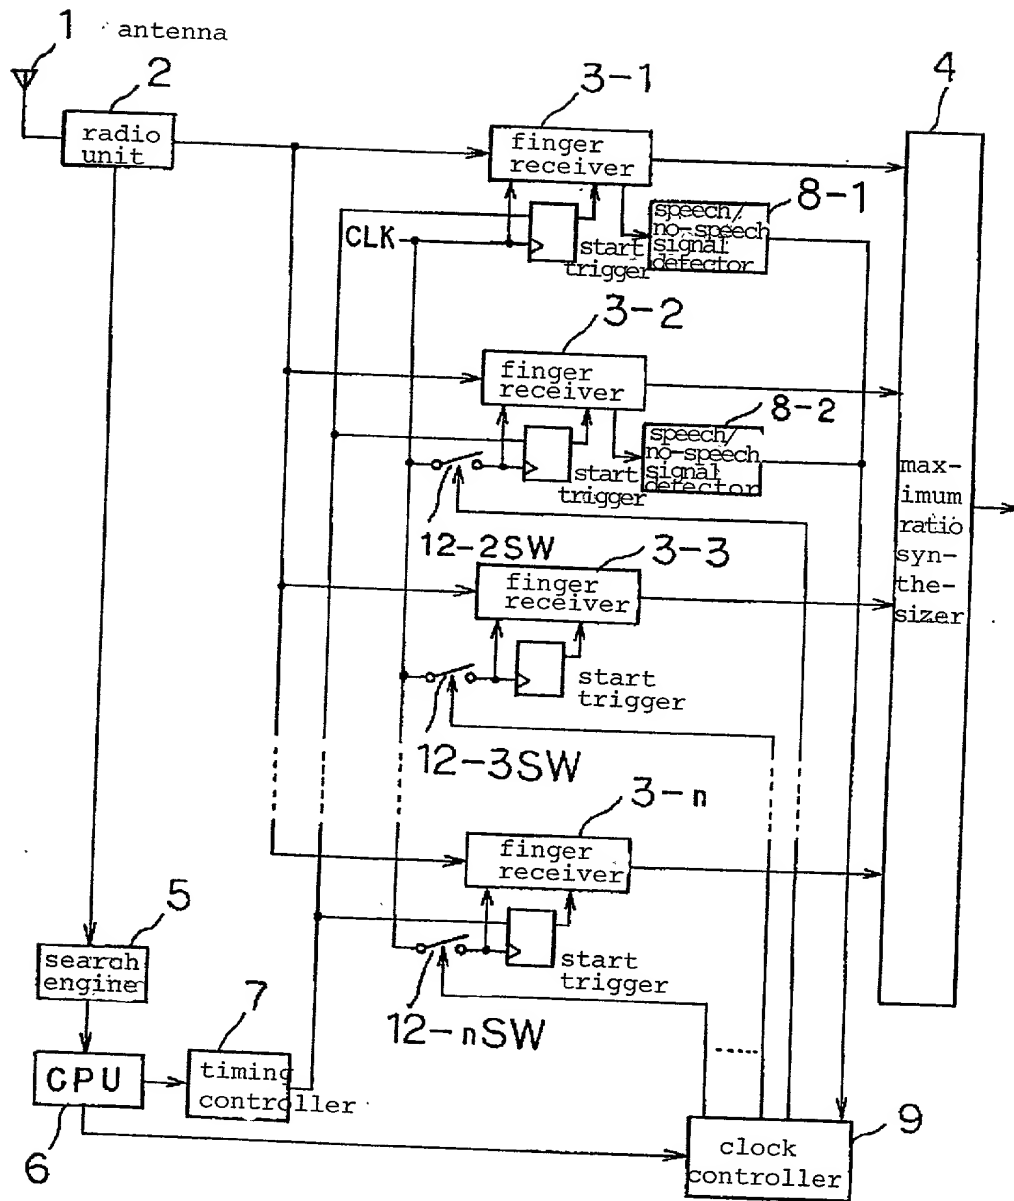


Fig. 12

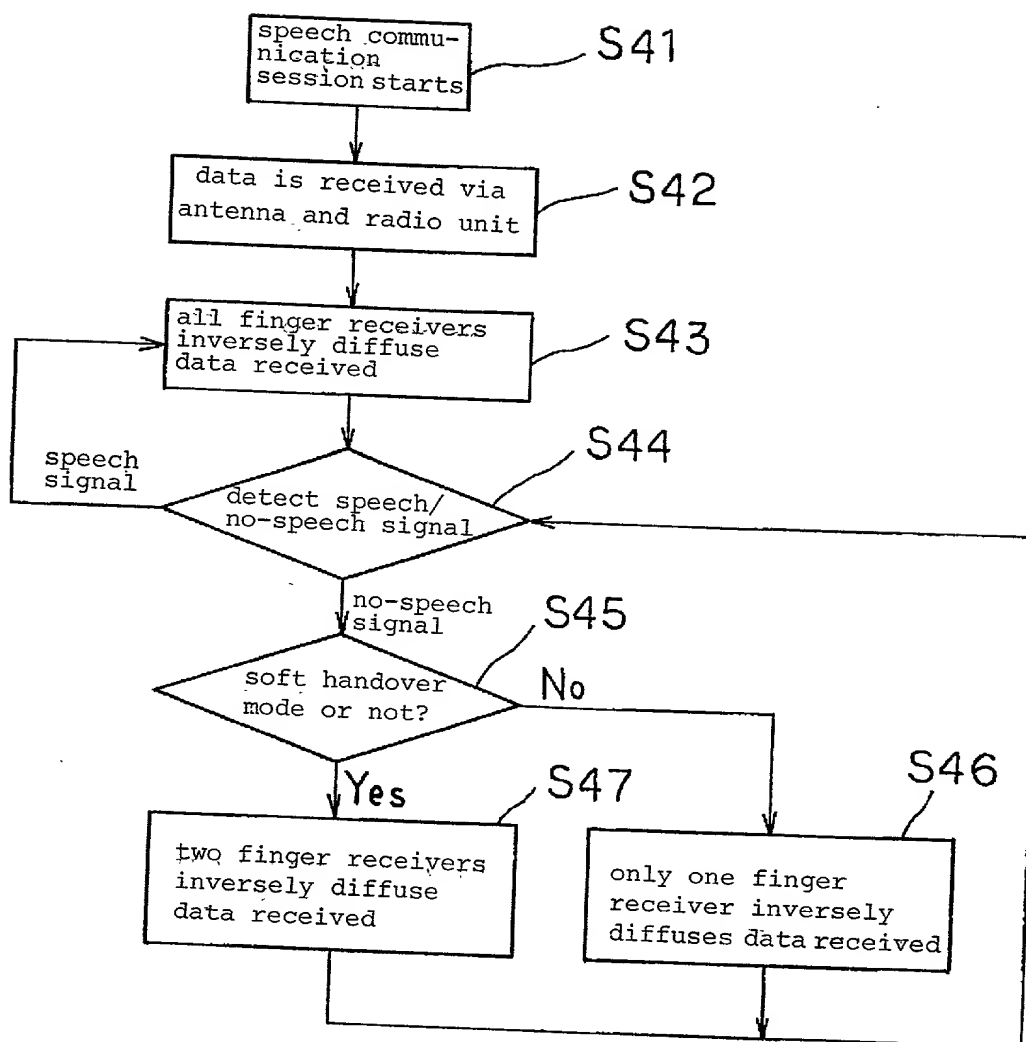


Fig. 13


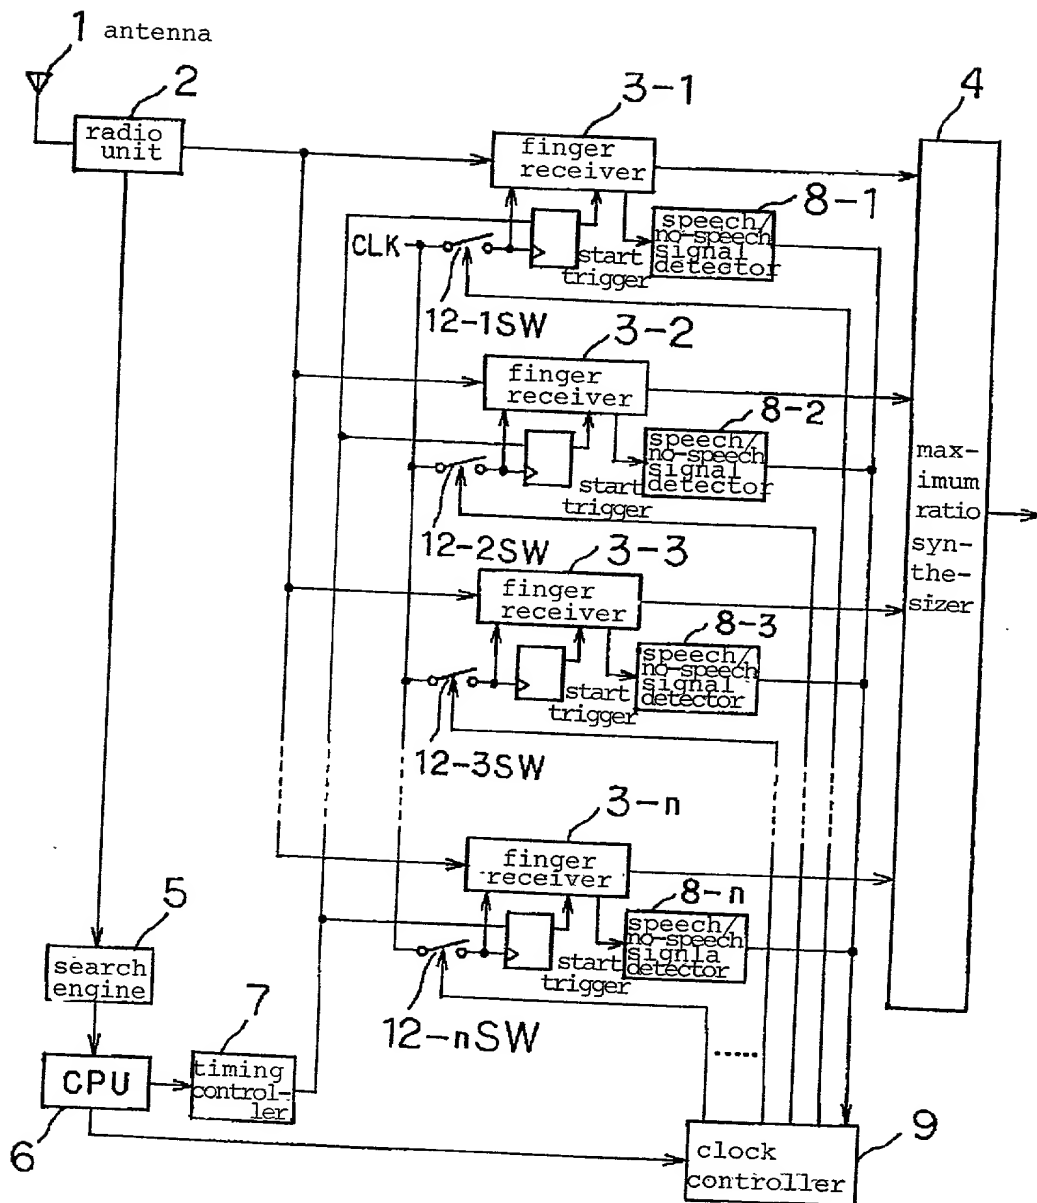


Fig. 14

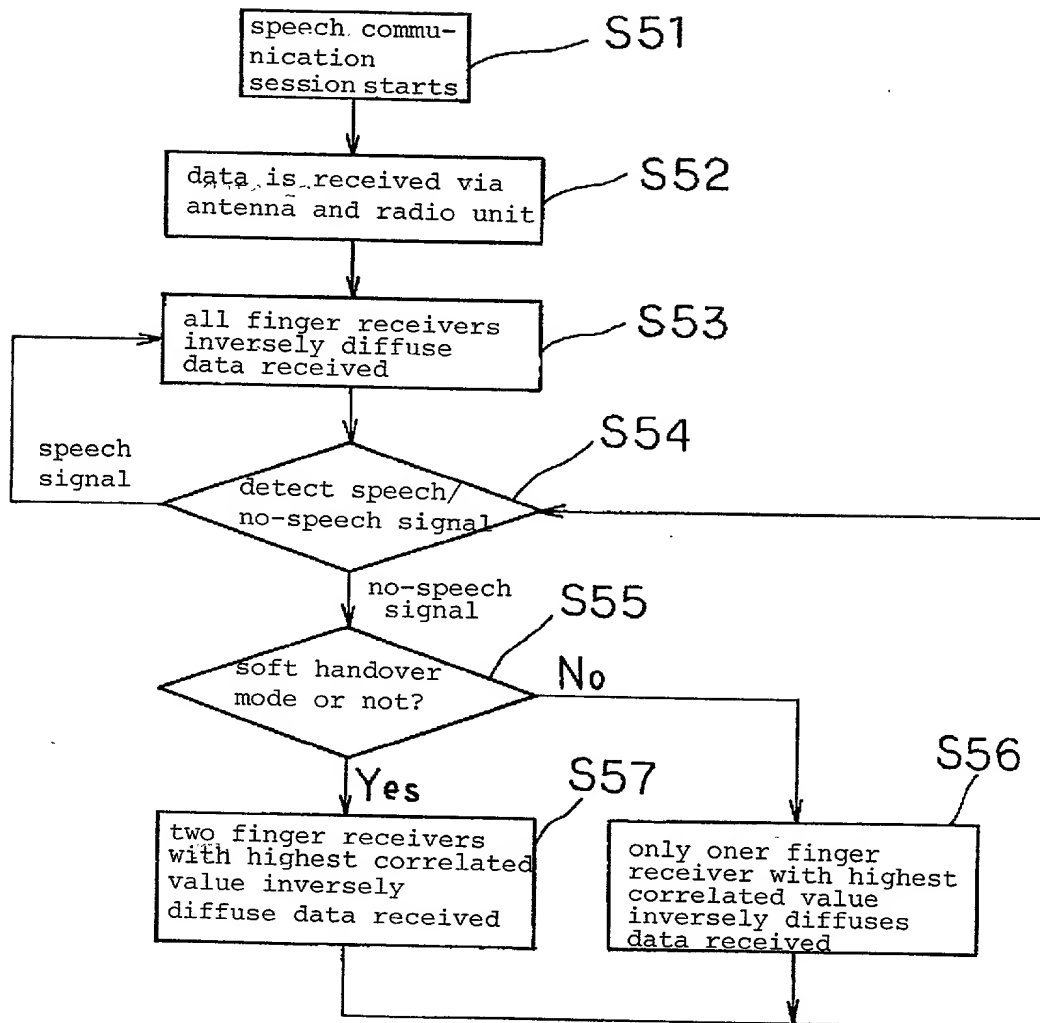

Docket No.
12994

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

RECEIVING CIRCUIT, MOBILE TERMINAL WITH RECEIVING
CIRCUIT, AND METHOD OF RECEIVING DATA

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International
Application Number _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

275683/1998	Japan	29/09/1998	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

- POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Stephen D. Murphy, Reg. No.: 22,002

Paul J. Esatto, Reg. No.: 30,749

William C. Roch, Reg. No.: 24,972


Mark J. Cohen, Reg. No.: 32,211

Frank S. DiGiglio, Reg. No.: 31,346

Donald T. Black, Reg. No.: 27,999

Send Correspondence to: Paul J. Esatto, Jr.
Scully, Scott, Murphy & Presser
400 Garden City Plaza
Garden City, New York 11530

Direct Telephone Calls to: *(name and telephone number)*
Paul J. Esatto, Jr. (516) 742-4343

Full name of sole or first inventor	TOMOAKI HOKAO	
Sole or first inventor's signature	<i>Tomoaki Hokao</i> 	Date September 7, 1999
Residence	Tokyo, Japan	
Citizenship	Japanese	
Post Office Address	c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan	

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	